




BLP7F54M

395W-410W

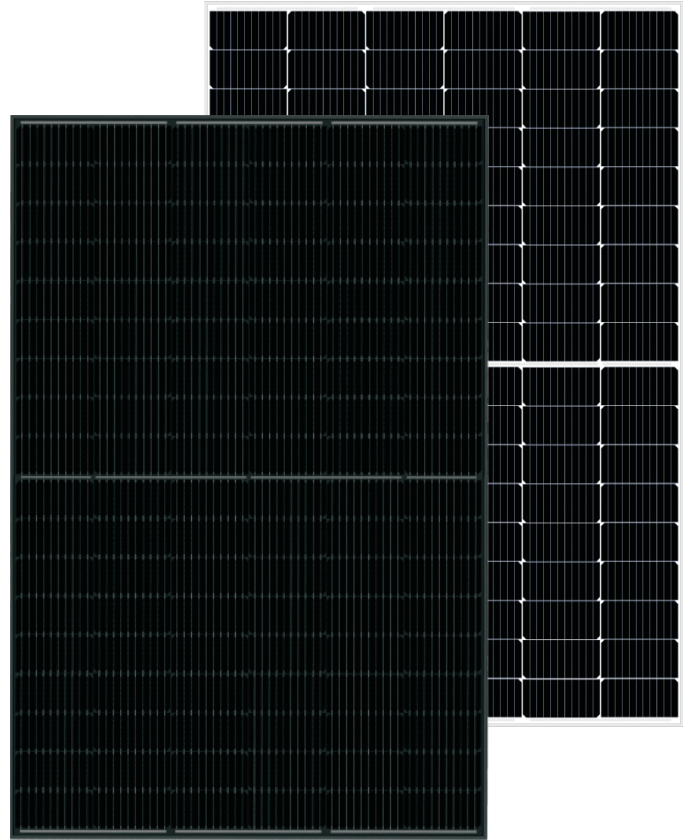

Key Specifications:



High output power



High transmissivity low-iron tempered glass, strong aluminium frame



Long lifespan, easy installation, high wind & hail impact resistance



100% A grade solar cell with positive tolerance power range



Low voltage-temperature coefficient allows higher power output at high-temperature condition

SYSTEM & PRODUCT CERTIFICATES


IEC 61215/IEC 61730 /UL 61730
ISO 9001: 2015 Quality Management System
ISO 14001:2015 Environment Management System
ISO 45001: 2018 Occupational Health and Safety Management Systems

QUALIFICATIONS AND CERTIFICATES



CE / IEC61215 / IEC61730

WARRANTY

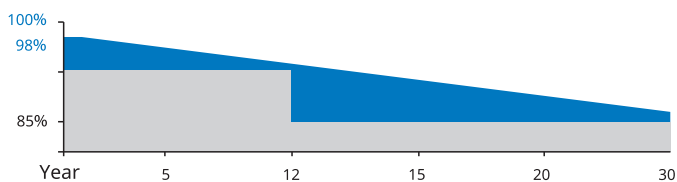

Guarantee on product material and workmanship




Linear Power output warranty


Bluesky

Bluesky Business GmbH
An der Strusbek 37
22926 Ahrensburg

PV DRAWINGS

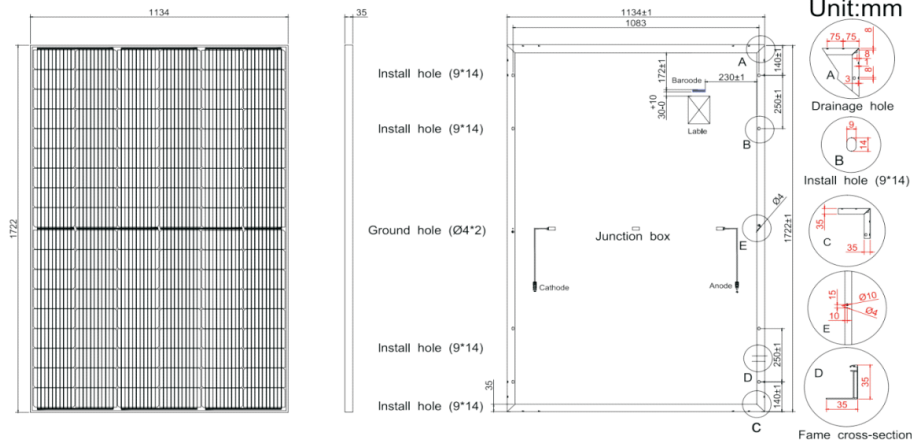

IV CURVE

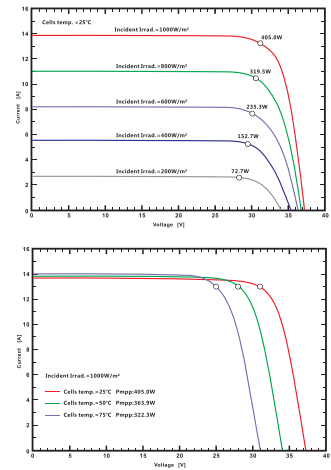

ELECTRICAL DATA (STC)

Model Type	BLP7F54M-395W	BLP7F54M-400W	BLP7F54M-405W	BLP7F54M-410W
Peak Power (Pmax)	395.00	400.00	405.00	410.00
Maximum Power Voltage (Vmp)	30.96	31.14	31.30	31.46
Maximum Power Current (Imp)	12.76	12.85	12.94	13.04
Open Circuit Voltage (Voc)	36.85±3%	37.05±3%	37.25±3%	37.45±3%
Short Circuit Current (Isc)	13.58±3%	13.67±3%	13.76±3%	13.85±3%
Module Efficiency (%)	20.23	20.49	20.74	21.01

* STC: irradiance 1000 W/m², AM 1.5G, and cell temperature of 25°C

ELECTRICAL DATA (NOCT)

Peak Power (Pmax)	296.25	297.40	301.10	304.80
Maximum Power Voltage (Vmp)	28.61	28.88	29.04	29.20
Maximum Power Current (Imp)	10.28	10.30	10.37	10.44
Open Circuit Voltage (Voc)	33.19±3%	34.69±3%	34.87±3%	35.05±3%
Short Circuit Current (Isc)	10.83±3%	11.00±3%	11.08±3%	11.16±3%

* NOCT: irradiance 800 W/m², AM 1.5G, ambient temperature 20°C, wind speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell Type	Monocrystalline 182*182mm
No. of Cells	108(6x18)
Dimensions	1724*1134*30mm
Weight	20.53kg
Front Glass	3.2mm high transmission, low iron, tempered glass
Frame	Anodized Aluminium Alloy
Junction box	IP67/IP68 3 diodes
Output cables	4mm ² cable 30cm+mc4
MaxWind Load/Snow Load	2400Pa/5400Pa


TEMPERATURE & MAXIMUM RATING

Maximum System Voltage (V)	1500V
Maximum Series Fuse Rating (A)	20A
Power Tolerance	0~+5W
Pmax Temperature Coefficients (W/°C)	-0.350%
Voc Temperature Coefficients (V/°C)	-0.270%
Isc Temperature Coefficients (A/°C)	+0.048%
NOCT Nominal Operating Cell Temperature (°C)	45±2°C
Operating and Storage Temperature (°C)	-40~+85°C

PACKING WAY

20FT	6 Packages/222PCS
40HQ	26 Packages/962PCS

PARTNER SECTION

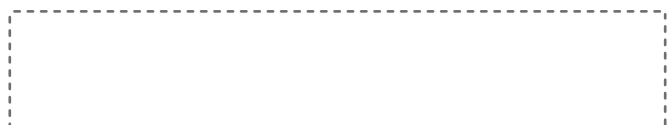

Bluesky

Bluesky Business GmbH
An der Strusbek 37
22926 Ahrensburg